

Kelin Waterborne epoxy adhesive ay isang high-end na produkto ng kapaligiran. Matte texture, ay nagbibigay sa iyo ng isang mababang-key luho pandekorasyon estilo, at ang pinagsamang ibabaw ay mukhang perpekto magkasya sa ceramic tile. Varieties ng mga kulay, hayaan ang iyong palamuti lugar sparkling. Ang subbase course ng waterborne epoxy dagta ay gumagawa ng produkto ganap na kapaligiran. Natural na buhangin calcined sa mataas na temperatura ay gumagawa ng kulay mas natural at maganda at hindi kailanman fades.

Ang produkto ay maaaring mas mahusay na ginagamit sa mga joints ng ceramic tile, bato, salamin, mosaic tile sa pader o harina sa banyo, kusina, kwarto at iba pa. Ito ay isang produkto ng kagustuhan sa palamuti ng pamilya, pagdaragdag ng negatibong oxygen ion upang linisin ang hangin. Australia joint research at development products upang gumawa ng mas mahusay na pagganap, at sa pamamagitan ng Chinese Academy of Sciences strategic control guidance control, upang gumawa ng kalidad ng produkto matatag. Maligayang pagdating sa Makipag-ugnay sa Amin-Kelin. [Tile Grout Sealer Supplier](#). pakikipagtulungan.



Varieties ng mga kulay para sa iyong pinili. Nagbibigay din ng mga pasadyang kulay.

- Gray 1#
- Gray 2#
- Gray 3#
- Gray 4#
- Gray 5#
- Gray 6#
- Gray 7#
- Gray 8#
- Gray 9#
- Cement Gray
- Dull Gray
- Silver Gray
- Metal Gray
- Luxury Silver
- Glacier White
- Calaeatta
- Pearl Gold
- Slate Gray
- Terra Brown
- Greyish Green
- Yellow Gray
- Soft Khaki
- Yellowish Brown
- Olive Brown
- Brownness
- Dark Brown
- Reddish Brown
- Rock Bslack



Magbigay ng buong solusyon sa kuwarto ng puwang



Maikling proseso ng konstruksiyon



01
Clean the tiles and keep it dry



02
Polish with tile wax except the glazed tile



03
Open & Watch, both sides can extruded meanwhile



04
Screw on the nozzle, put on the grout gun



05
Inclined cut the top of the nozzle in 45°



06
Squeeze out 60-80cm long grout in the forefront



07
Evenly squeeze out the tile agent along the gap



08
Press the grout with professional glue-press tools



09
Don't touch in 4-5 hours and remove excess grout then.



10
Keep the tiles dry in 24 hours

Professional joint-pressing tool.



01
Cutter Knife



02
Pointing trowel



03
Brush



04
Rainbow Scraper



05
Stirring Knife




06
The sponge



07
Scouring Pad

Kumpanya ng Kumpanya

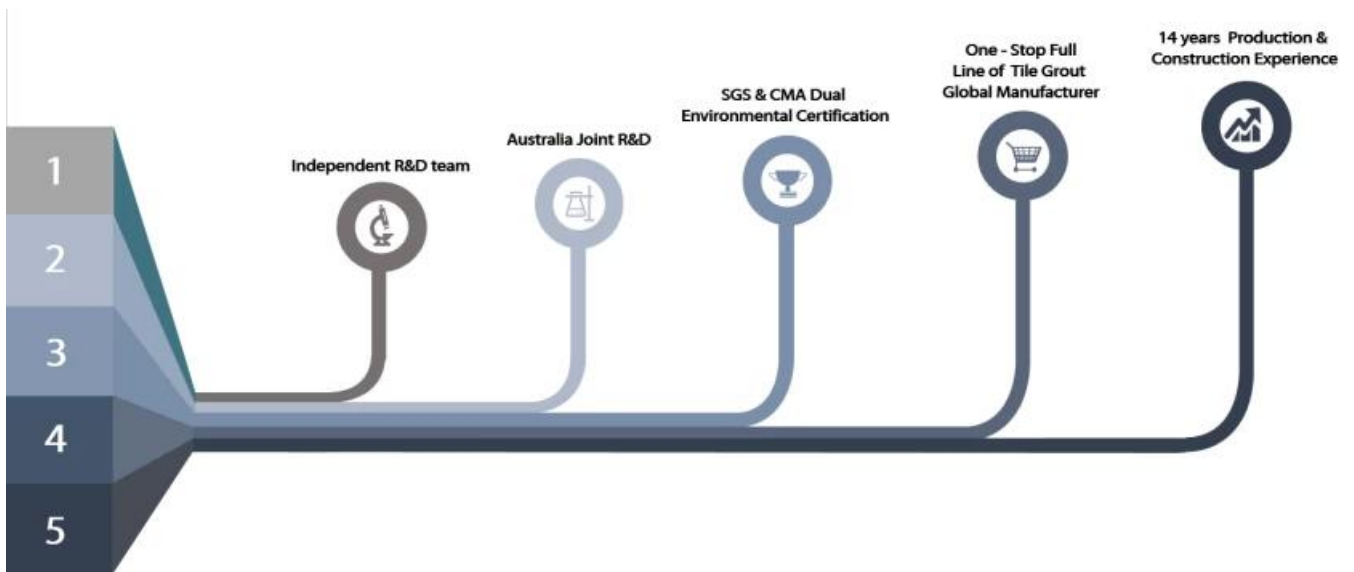

Pangkalahatang-ideya ng pabrika



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Raw Material Stock



Stock

Sertipikasyon

